

AQUEAS AQ-SP03 STARTING PLATFORM









The AQUEAS AQ-SP03 Starting Platform is designed for a narrow style coping (end wall), two front legs on the coping and two rear legs are extended and sit on the concourse. It will suit a coping between 90 mm but no higher than 330 mm from the water level.

The starting platform is made of heavy duty 316 mirror polished stainless steel 38 mm^e with a 500 mm x 500 mm non-slip patterned fibreglass top. It features a backstroke bar at the front and a non-slip step at the rear.

Fixing options:

- (A) Fixed Fixed using 100 mm dia. leg flanges
- (B) Removable with standard legs 2 x AQ-PS01 sockets on the front legs and cap ends on the rear legs
- (C) Removable with articulated rear legs 2 x AQ-PSO1 sockets on the front legs and articulated feet on the rear legs

The (C) Removable is a popular choice as the articulated feet compensate for an uneven surfaces. Removable (B) & (C) blocks can be stored away when not required.



Platforms are supplied with blue tops as standard but can be ordered with white tops by request.

Platforms are supplied without lane numbers, if lane numbers are required this is an option and must be requested at time of placing an order.

Brand: AQUEAS

Frame: Heavy Duty Stainless Steel 38 mm^ø

Top: Fibreglass 500 mm x 500 mm

Finish: Mirror Polished

Height from coping: 420 mm













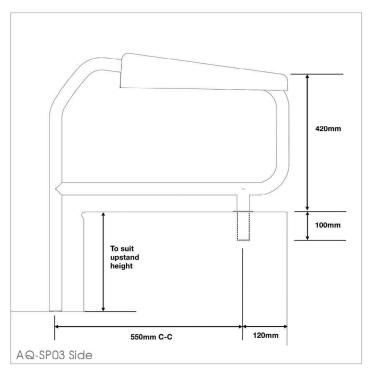

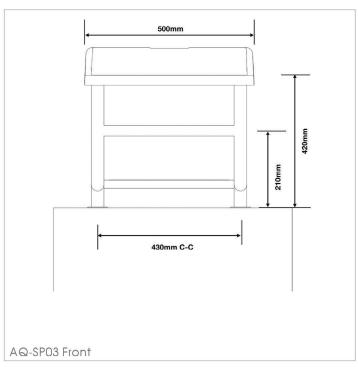

PAQ-SP03-A
AQUEAS Starting Platform Flanged AQ-SP03-A
AQUEAS Starting Platform Socket/Std Leg AQ-SP03-B
PAQ-SP03-C
AQUEAS Starting Platform Socket/Adj Leg AQ-SP03-C

Option:

PAQ-SPN002 AQUEAS Starting Platform Numbers AQ-SPN002 (4 per unit)

